


Ask for the original.
Ask for the
No.1 Brand.

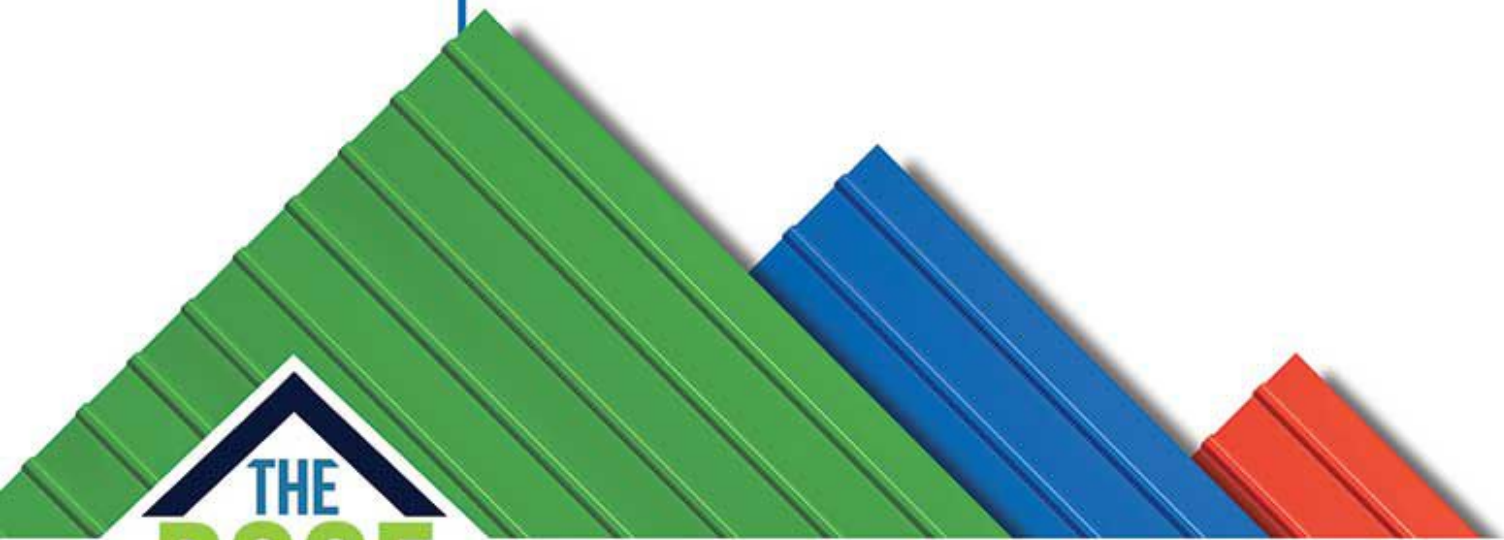

CALL +91-361-2130188

COLOURFUL RANGE | THERMAL AND CORROSION RESISTANCE
LOW MAINTENANCE | ROOF SQUAD

Product Specification:

Colour Coated Roofing Sheet

Substrate Material	Aluminium and zinc alloy coating with steel base. (55% Al, 43.5% Zn and 1.5% Silicon)
Alloy Coating	AZ 150 or AZ 100.
Thickness	0.35 mm-0.80 mm
Yield Strength	Minimum 550 mpa
Standards	As per ASTM A792 / A792M & AS1397
Paint System	RMP/ SMP
Characteristics	Top Coat: 18-20 micron Primer Top Coat: 5-7 micron Back Coat: 6-8 micron Primer Back Coat: 3-4 micron

Purlin distance : For Hi Rib Profile sheet

Thickness	Purlin Gap
0.35 & 0.40 mm	0.900 mm to 1.100 mm
0.45 & 0.50 mm	1.100 mm to 1.400 mm



Purlin distance : For Tiles Profile sheet

Thickness	Purlin Gap
0.40 mm & 0.50 mm	0.800 mm to 0.950 mm


*Other paint system viz. Super Durable Polyester (SDP), Poly Vinylidene Flouride (PVDF) can be supplied as per customer's requirements.

Profile Technical Specification:

STEEL TILES

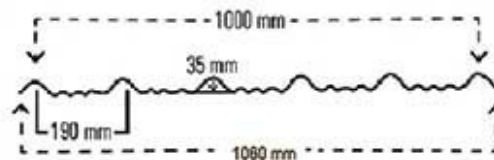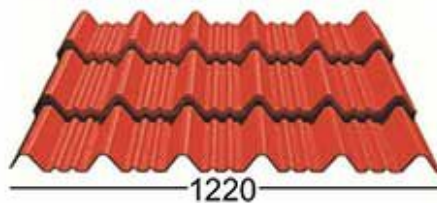

HI-RIB

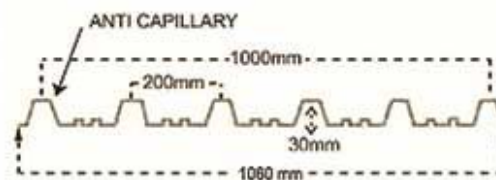

HI-RIB XL




New!



*More colours can be provided as per standard RAL shades
*Colours may vary from the shades shown above

Accessories



SCREW SPECIFICATIONS

- **Standard AS 3566** - The AS 3566 is a standard established by the Standard Association of Australia to specify the requirement for a Self Drilling Screw to be suitable for use in Steel and Timber purlins.
- **Grade** - Class 3 Coating is a unique anti-corrosive coating system consisting of 3 distinct layers which combine to give exceptional protection.
- **Base Materials** - Carbon Steel Grade - 1022.
- **Anti-Corrosive Test** - 1000 Hours Salt Spray test done by Regional Testing Centre (Govt. of India) New Delhi and Sriram Institute for Industrial Research - New Delhi.
- Coated with **Xylan** to prevent rusting.
- **PVC Colour caps** are provided to match with the colour of the sheets for an aesthetic look.
- Corrosion proof **SDST(Self Drilling Self Tapping) screws** with **EPDM washers** ensure a strong and weather-tight attachment.
- Tek points of SDST screws act as a drilling bit, with the help of **13RE drilling machine** it gets drilled and tap their own threads into the purlins.



Protective Guard Film must be removed prior to installation of profile sheets.

DynaRoof, the pioneers and market leaders of new age colour-coated roofing brings you the perfect style statement for your home. Since its inception DynaRoof has emerged as India's unsurpassed leader in residential and commercial roofing. With a dedicated plant in Meghalaya running on the latest equipments, it has successfully implemented projects across the region. Colourfully striking and long lasting, the roof comes with a host of features that put you at an advantage. Find out more about how DynaRoof keeps your home looking everlastingly beautiful so that you stay secure underneath, and always stylish at the top.

Why you should trust DynaRoof

Expertise and Experience

With 56 years of industry experience we are pioneers in manufacturing colour-coated roofs and wall cladding.

High Quality

Our raw materials are sourced from leading steel manufacturers across India and overseas. Our sheets are profiled in our own manufacturing facility using cutting-edge international technology.

Fastest Delivery time

Our factory located in Meghalaya has an installed capacity of 20,000 MT pa and we use a well knit distribution process.

Competitive Edge

We offer the best products at the best possible prices.

All Facilities Under One Roof

From designing, manufacturing to fixing, servicing, we have it all under one roof.

Range of Products

Our products range from pre-painted Galvanized and Galvalume sheets, bare Galvalume sheets and Steel Tile profile sheets.

Why DynaRoof stays stunning for years



WP+
THERMAL & CORROSION PROOF
WEATHER PROTECTION

Extreme Endurance

DynaRoof withstands chipping, cracking, peeling and doesn't fade or lose luster.

Aesthetic Appeal

Variety of shades and overall finish due to SMP and RMP coatings keep it looking beautiful over the ages.

Easy on Environment

DynaRoof is 100% recyclable like other steel products and does not harm the planet.

Thermal Resistant

It reflects great amount of heat and light and can withstand extreme weather, be it heat or hail, without discolouration.

Pocket Friendly

High tensile property makes it very strong and durable. One can reduce no. of purlins by increasing purlin spacing, reducing overall weight & cost of the shed and civil foundation.

Anti Corrosive Coatings

RMP / SMP coatings make it 2-3 times more corrosion resistant than ordinary galvanized sheets.

Low Maintenance

Its anti-corrosive and thermal resistant properties make it low maintenance and just by cleaning debris accumulated on it annually, the roof stays in top condition.

Installation Support

Only DynaRoof has Roof Squad, a full fledged team of highly skilled workers who can install roofs and provide all other solutions.



Dyna Roof Pvt. Ltd.

Anil Plaza, 5th Floor, G S Road, Guwahati - 781005, India

Phone: 91-361-2465255/256, Fax: 0361-2465257

E-mail: info@dynaroof.com, website: www.dynaroof.com

Factory: 10th Mile, Mawsamai Village, Ri-Bhoi District, Meghalaya - 793101

